



NAME _____ RACE _____ DATE _____
 TRACK _____ CITY/COUNTRY _____ TRACK CONDITION _____

SET-UP SHEET

AIR TEMP F C
 LAPS _____
 BEST LAP TIME _____ in LAP
 TRACK SIZE
 OPEN MEDIUM TIGHT
 TRACK TRACTION
 HIGH MEDIUM LOW

DIFFERENTIAL

FRONT	BEVEL	REAR
	PINION	
	DIFF.	

OIL wt.
 1M FRONT 50K REAR

CLUTCH

SHOE BRAND _____
 COMPOUND 2 ALUM 1 CARBON
 SPRING BRAND _____
 TENSION 1.1 mm
 CLUTCH SHOES _____ SHOE _____

GEARING

	1ST.	2ND.
SPUR GEAR	62 T	58 T
PINION GEAR	19 T	24 T

TIRES

FRONT TYPE _____
 COMPOUND _____
 INSERT FOAM _____
 REAR TYPE _____
 COMPOUND _____
 INSERT FOAM _____


ENGINE

TYPE _____
 PORT _____
 PLUG _____
 PIPE _____
 NOTE _____

BODY

BRAND _____
 TYPE _____

FRONT

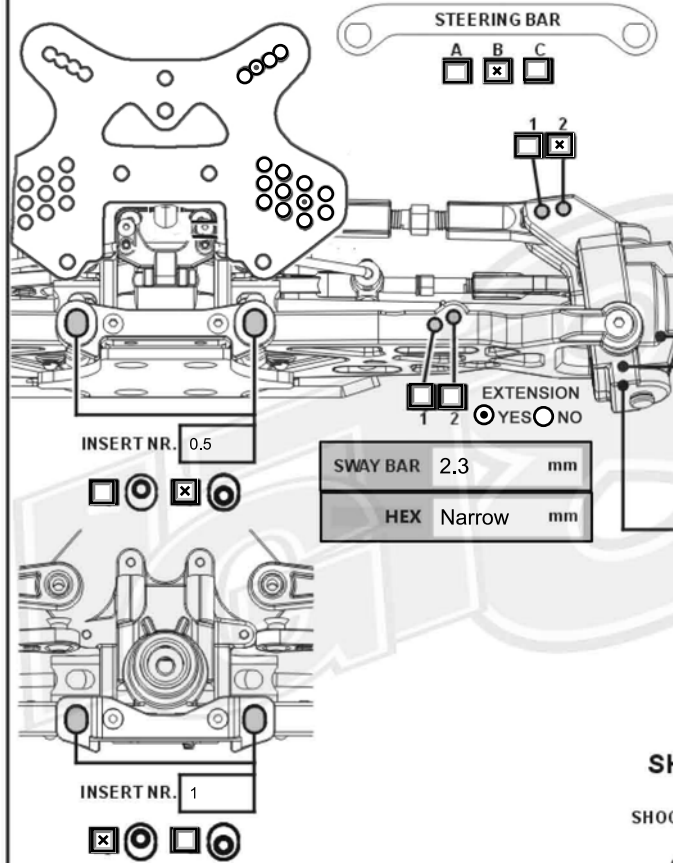


RIDE HEIGHT 7.5 mm
 DROOP 10 mm
 CAMBER ANGLE 2 °
 TOE ANGLE -1 °
 PLASTIC ALUM

FRONT SPINDLE CARRIERS
 PLASTIC ALUM
 STEERING KNUCKLE ARM
 PLASTIC ALUM
 FRONT SPINDLE CARRIERS CASTER
 10°
 12°
 14°

SHOCK

SHOCK LENGTH FRONT _____ mm
 OIL wt. 800
 PISTON 1.4 mm
 SPRING 2.3
 SHOCK LENGTH

REAR

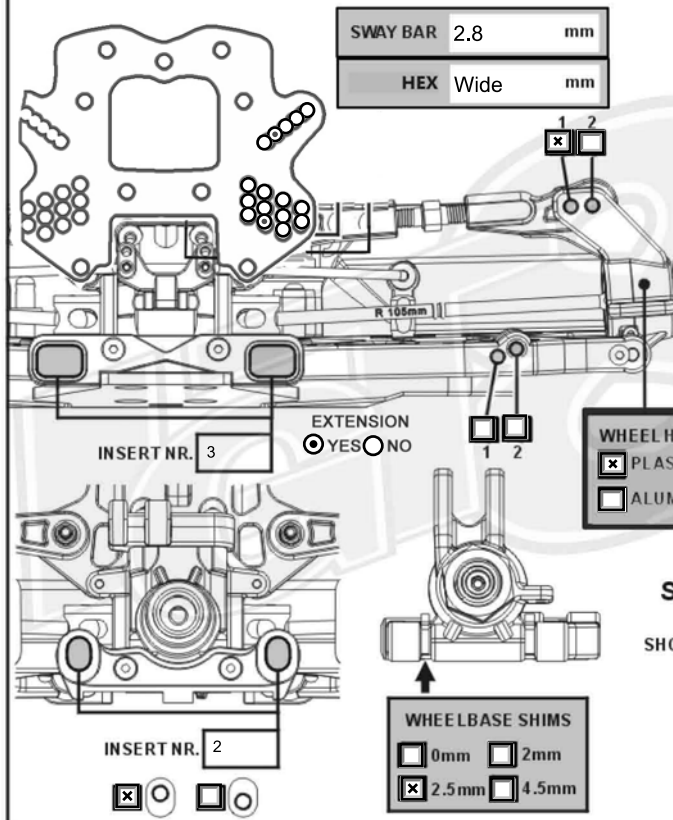

RIDE HEIGHT 8 mm
 DROOP 12 mm
 CAMBER ANGLE 3.5 °
 TOE ANGLE _____ °
 PLASTIC ALUM

SHOCK

SHOCK LENGTH REAR _____ mm
 OIL wt. 800
 PISTON 1.4 mm
 SPRING 2.4
 SHOCK LENGTH