



NAME \_\_\_\_\_ RACE \_\_\_\_\_ DATE \_\_\_\_\_  
 TRACK \_\_\_\_\_ CITY/COUNTRY \_\_\_\_\_ TRACK CONDITION \_\_\_\_\_

## SET-UP SHEET

AIR TEMP  F  C  
 LAPS \_\_\_\_\_  
 BEST LAP TIME \_\_\_\_\_ in LAP  
 TRACK SIZE  
 OPEN  MEDIUM  TIGHT  
 TRACK TRACTION  
 HIGH  MEDIUM  LOW

**DIFFERENTIAL**

FRONT	BEVEL	REAR
13	PINION	13
43	DIFF.	43

OIL wt.  
 500 FRONT 70 REAR

**CLUTCH**

SHOE BRAND IGT8  
 COMPOUND  ALUM  CARBON  
 SPRING BRAND IGT8  
 TENSION 3 mm  
 CLUTCH SHOES \_\_\_\_\_ SHOE \_\_\_\_\_

**GEARING**

	1ST.	2ND.
SPUR GEAR	62 T	58 T
PINION GEAR	19 T	24 T

**TIRES**

FRONT TYPE Matrix  
 COMPOUND Soft  
 INSERT FOAM -  
 REAR TYPE Matrix  
 COMPOUND Soft  
 INSERT FOAM -


**ENGINE**

TYPE Nova  
 PORT Sport  
 PLUG CT6  
 PIPE TS-2139  
 NOTE 41032 header

**BODY**

BRAND JZ Flow  
 TYPE \_\_\_\_\_

### FRONT

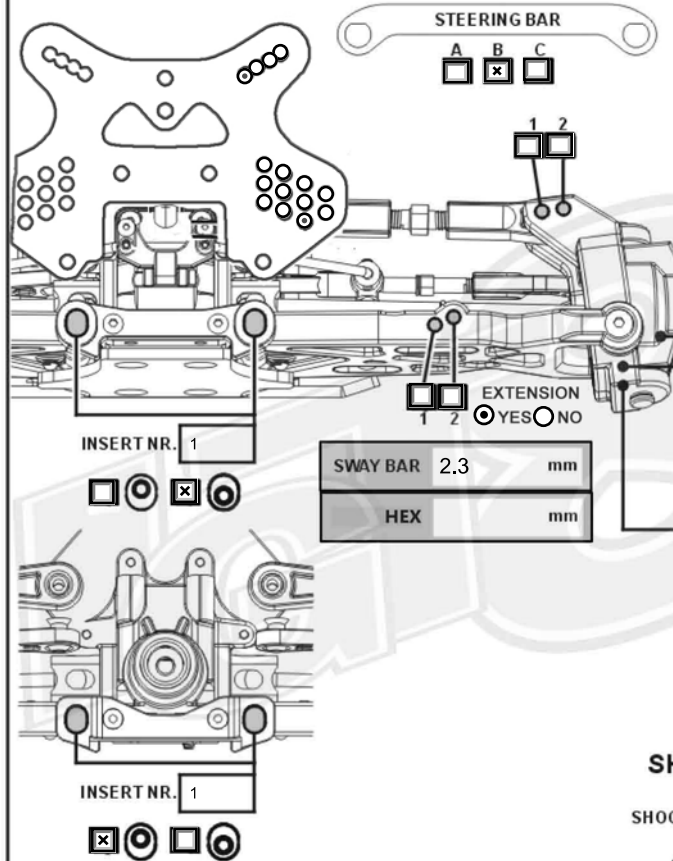

RIDE HEIGHT 8 mm  
 DROOP 8 mm  
 CAMBER ANGLE 1.5 °  
 TOE ANGLE -1 °

PLASTIC  ALUM

FRONT SPINDLE CARRIERS  
 PLASTIC  ALUM

STEERING KNUCKLE ARM  
 PLASTIC  ALUM


FRONT SPINDLE CARRIERS CASTER  
 10°  
 12°  
 14°

**SHOCK**

SHOCK LENGTH FRONT \_\_\_\_\_ mm  
 OIL wt. 800  
 PISTON 1.4 mm  
 SPRING 2.4

SHOCK LENGTH

### REAR

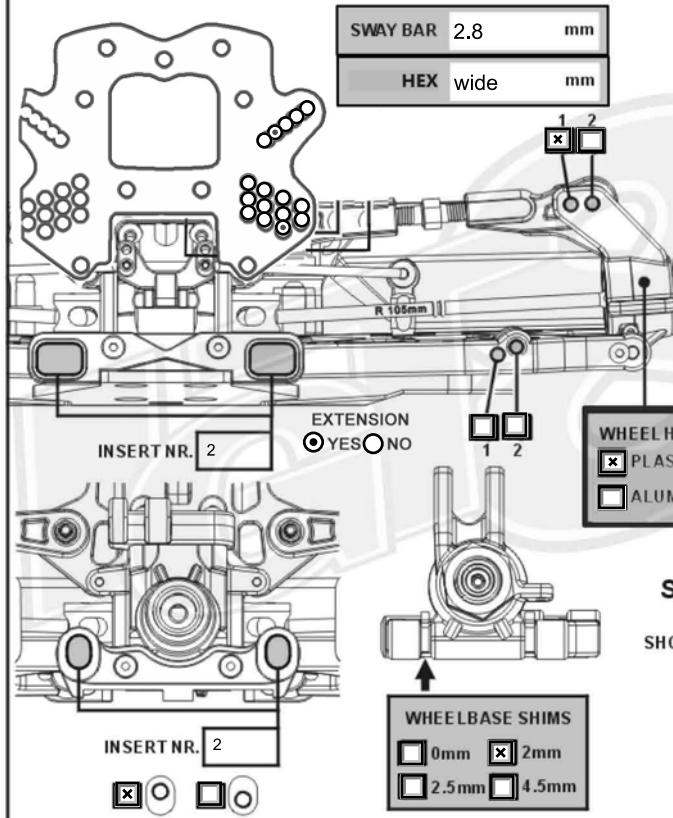

RIDE HEIGHT 9 mm  
 DROOP 12 mm  
 CAMBER ANGLE 3.5 °  
 TOE ANGLE 2 °

PLASTIC  ALUM

**SHOCK**

SHOCK LENGTH REAR \_\_\_\_\_ mm  
 OIL wt. 800  
 PISTON 1.4 mm  
 SPRING 2.4

SHOCK LENGTH