



SET-UP SHEET

AIR TEMP ☐ F ☐ C

LAPS

BEST LAP TIME

in LAP

TRACK SIZE

☐ OPEN ☐ MEDIUM ☐ TIGHT

TRACK TRACTION

☐ HIGH ☐ MEDIUM ☐ LOW

DIFFERENTIAL

FRONT BEVEL REAR

PINION

DIFF.

OIL wt.

FRONT

REAR

CLUTCH

SHOE BRAND

COMPOUND ☐ ALUM

☐ CARBON

SPRING BRAND

TENSION mm

CLUTCH SHOES

SHOE

GEARING

1ST. 2ND.

SPUR GEAR

T

T

PINION GEAR

T

T

TIRES

FRONT TYPE

COMPOUND

INSERT FOAM

REAR TYPE

COMPOUND

INSERT FOAM

ENGINE

TYPE

PORT

PLUG

PIPE

NOTE

BODY

BRAND

TYPE

NAME

RACE


DATE

TRACK

CITY/COUNTRY

TRACK CONDITION

FRONT

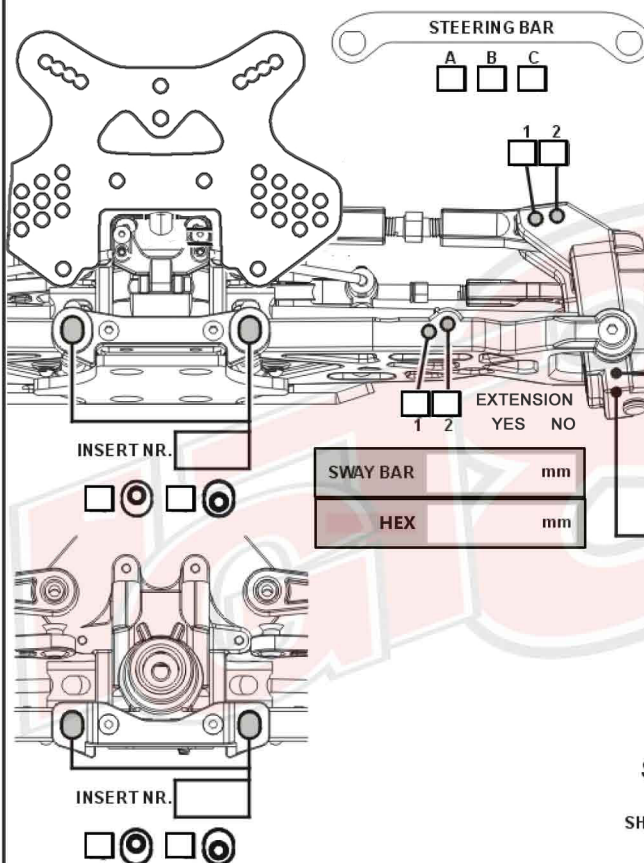

STEERING BAR

A B C

1 2

EXTENSION
YES NO

SWAY BAR mm

HEX mm

INSERT NR.

☐ ☐ ☐ ☐

INSERT NR.

☐ ☐ ☐ ☐


RIDE HEIGHT mm

DROOP mm

CAMBER ANGLE °

TOE ANGLE °

☐ PLASTIC ☐ ALUM



FRONT SPINDLE CARRIERS

☐ PLASTIC

☐ ALUM

STEERING KNUCKLE ARM

☐ PLASTIC

☐ ALUM

FRONT SPINDLE CARRIERS CASTER

☐ 10°

☐ 12°

☐ 14°

SHOCK

FRONT

SHOCK LENGTH mm


OIL wt.

PISTON

SPRING



REAR

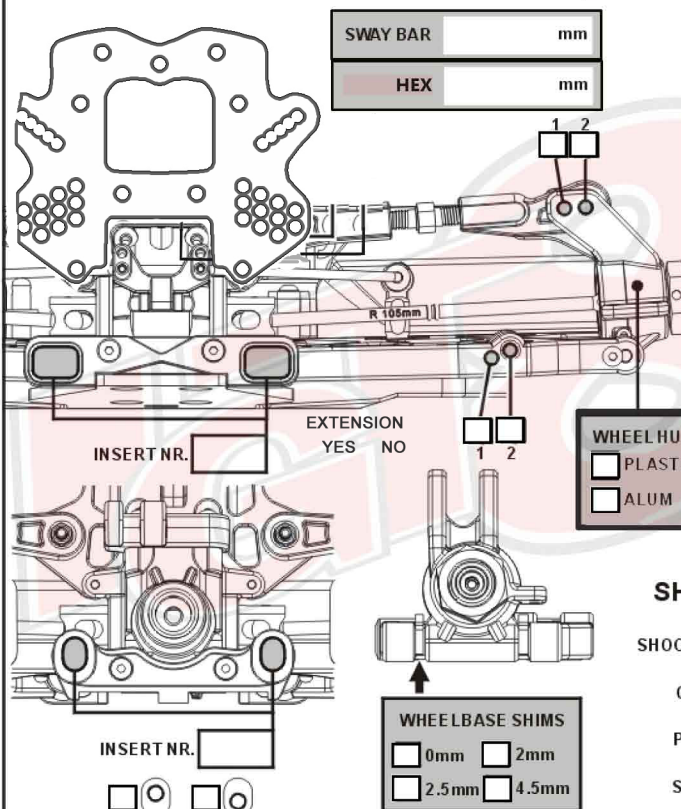

SWAY BAR mm

HEX mm

1 2

EXTENSION
YES NO

WHEEL HUB

☐ PLASTIC

☐ ALUM

INSERT NR.

☐ ☐ ☐ ☐

INSERT NR.

☐ ☐ ☐ ☐


RIDE HEIGHT mm

DROOP mm

CAMBER ANGLE °

TOE ANGLE °

☐ PLASTIC ☐ ALUM



SHOCK

REAR

SHOCK LENGTH mm

OIL wt.

PISTON

SPRING

